

feel the fab





luxurious feel with its unique blend of glossy and matte finishes. The surface is smooth and non-reflective, adding depth to any space.

**design,
strategy
and
innovation.**





turning ideas into materials

Transform your space and create something beautiful with these versatile tiles

With a perfect mix of production capacity, experimentation and sustainability, we have made a name for ourselves worldwide, constructing a 100% Italian identity in which creativity, teamed with ongoing technological research, defines the value of each product, making it unique and exclusive.

inspiring better living

design for BETTER LIFE

Current architectural and design trends show that quality of life is now considered a democratic, attainable and everyday value. In recent years, "complete project" that starts with producing eco-friendly design materials and leads to a wider range of solutions that support creativity, social well-being and sustainability. Inspiring better living reflects the company's desire to adopt a behaviour that is also an inspiration to the community, aware that individual actions can make a significant difference.





so smooth

Experience the incredibly smooth surface of the
Its unique texture creates a luxurious feel that adds depth to any space.



ultra technical


designed with the latest technology to resist fire, stains,
and markers. The image showcases its durability and reliability.





shape your idea

We offer integrated solutions for flooring and cladding, technical applications, ventilated facades, raised floors, tactile floors.

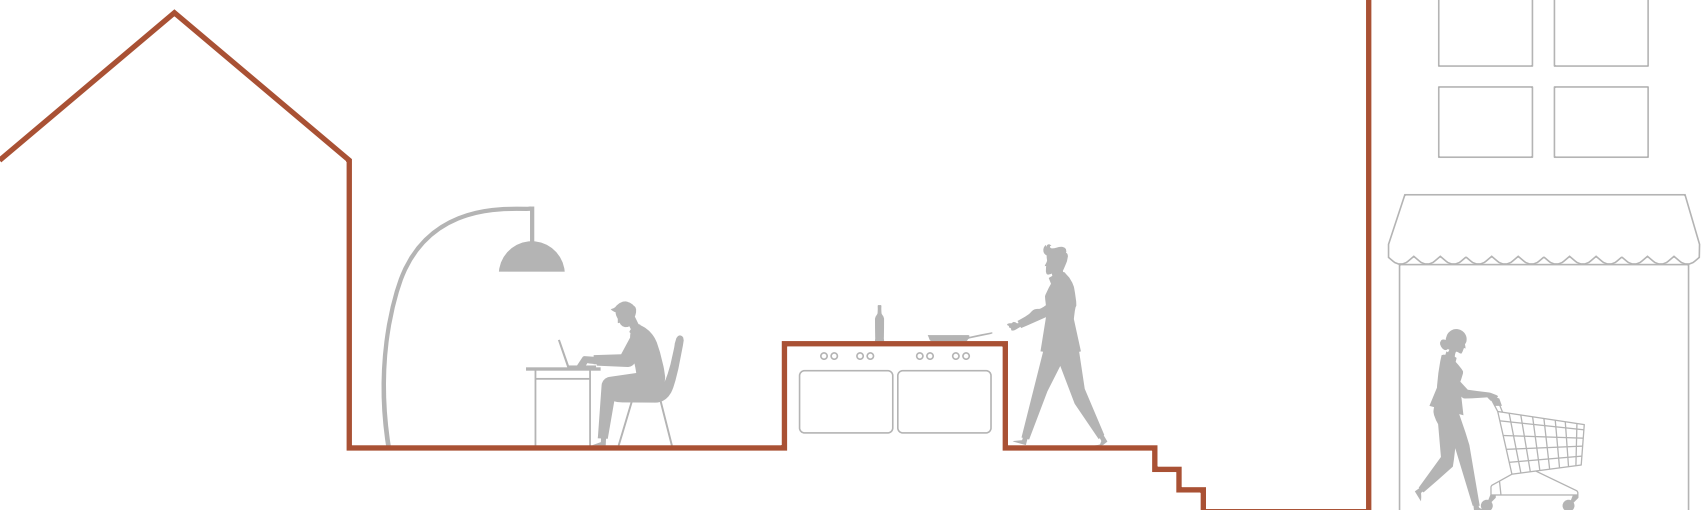

index

"Transform your space with the durability and easy maintenance of the Explore our versatile range of colors today."





armani beige


armani beige

fab surface

1200x1800mm

9mm thickness

Random : **03**

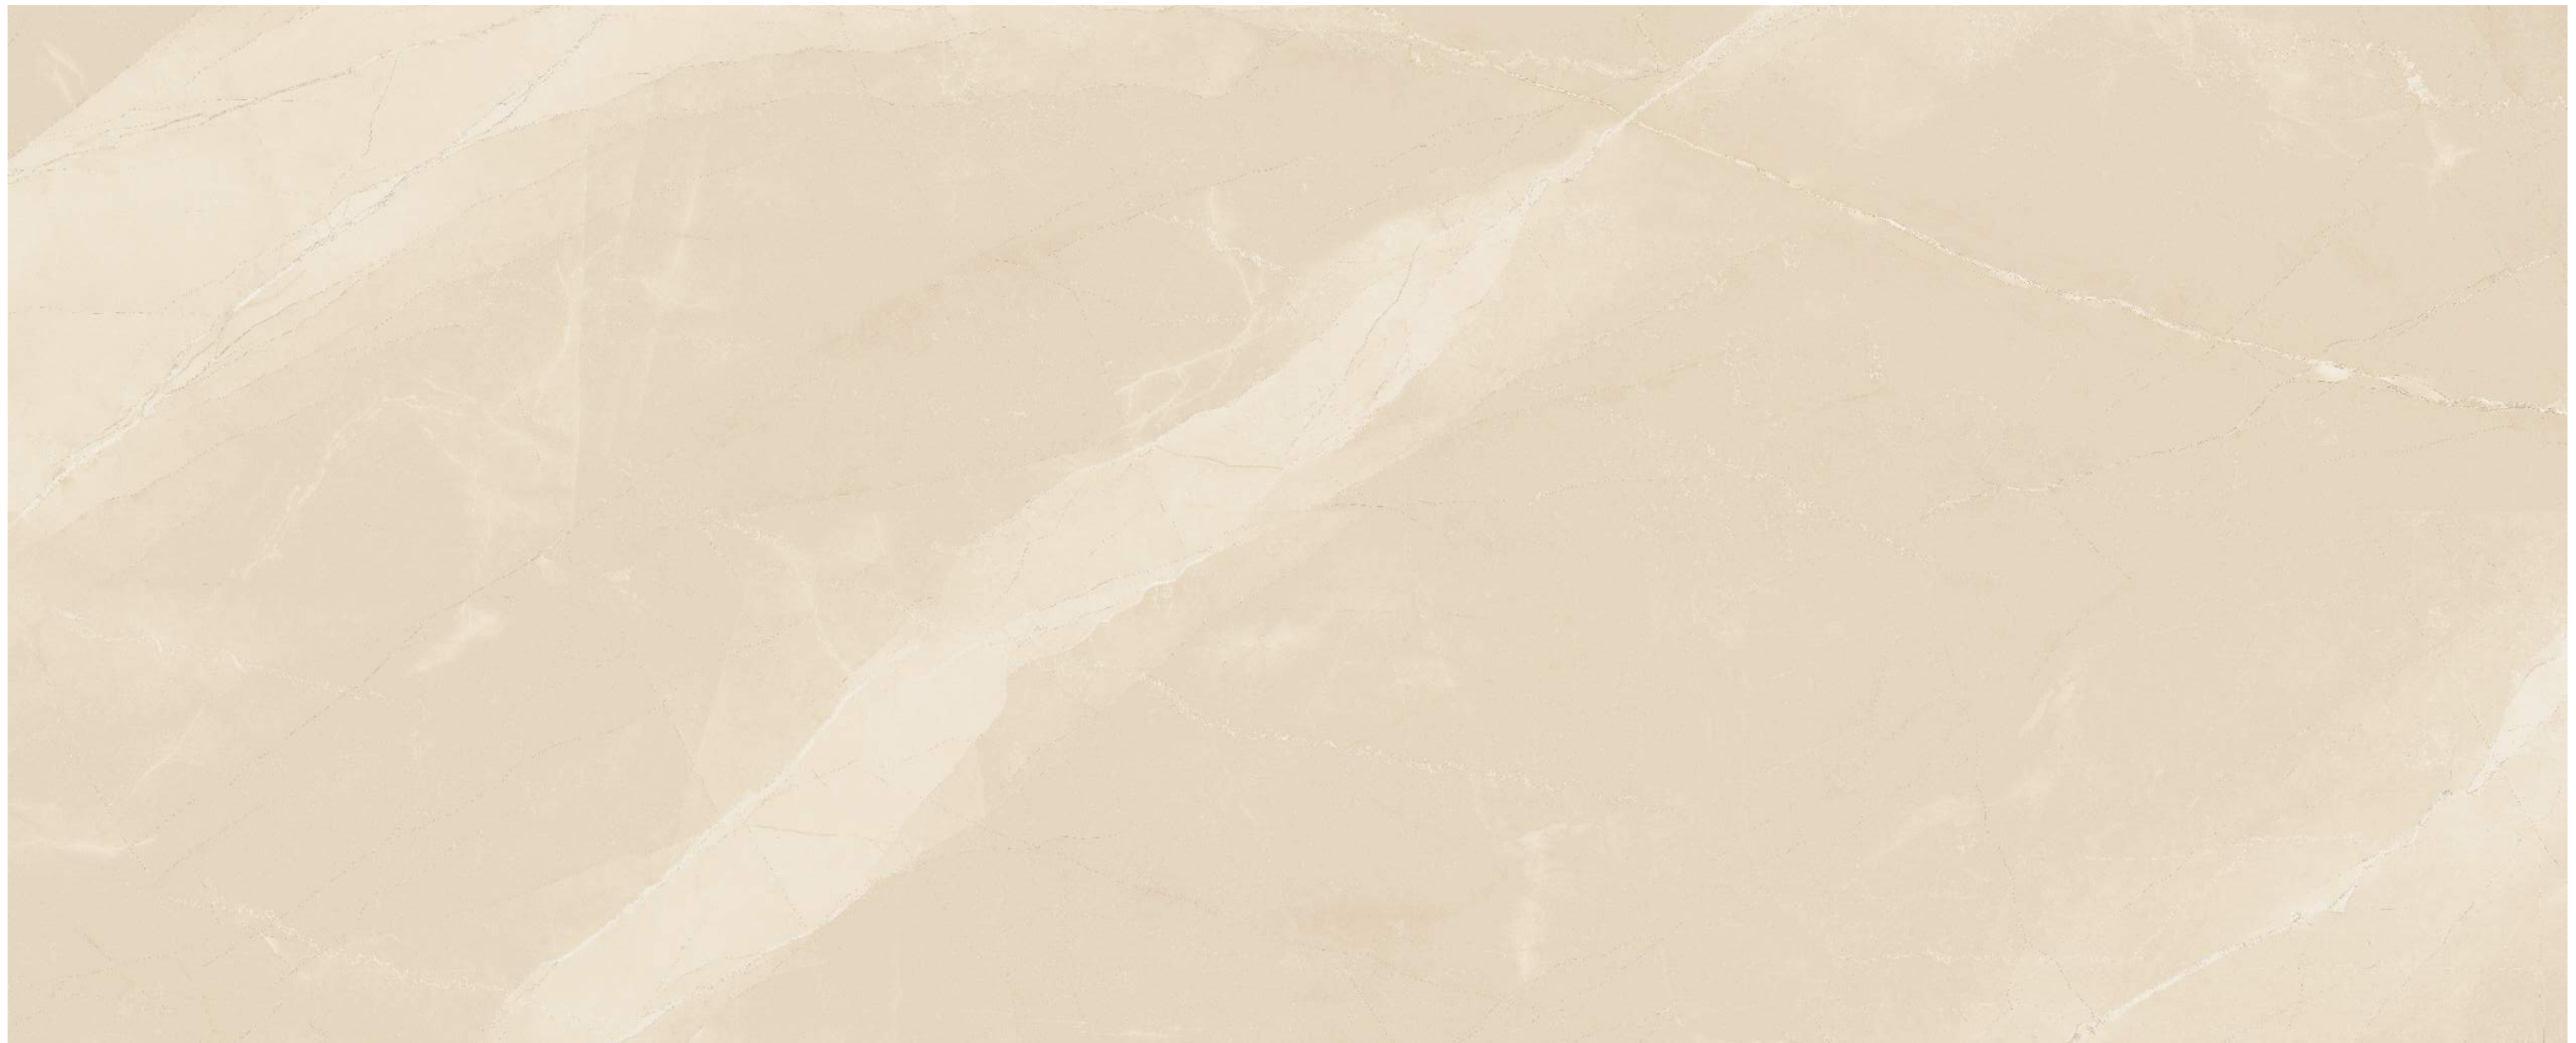



Wellness



arrezzo bianco

arrezzo bianco

fab surface

ENDLESS

1200x1800mm

9mm thickness

Random : 03





bosco grey

bosco grey

fab surface

1200x1800mm

9mm thickness

Random : **03**





castle grey

castle grey

fab surface

1200x1800mm

9mm thickness

Random : 03





celina natural

celina natural

fab surface

1200x1800mm

9mm thickness

Random : 02





crema elice

crema elice

fab surface

1200x1800mm

9mm thickness

Random : 02





cocada dream light


cocada dream light

fab surface

1200x1800mm

9mm thickness

Random : **03**

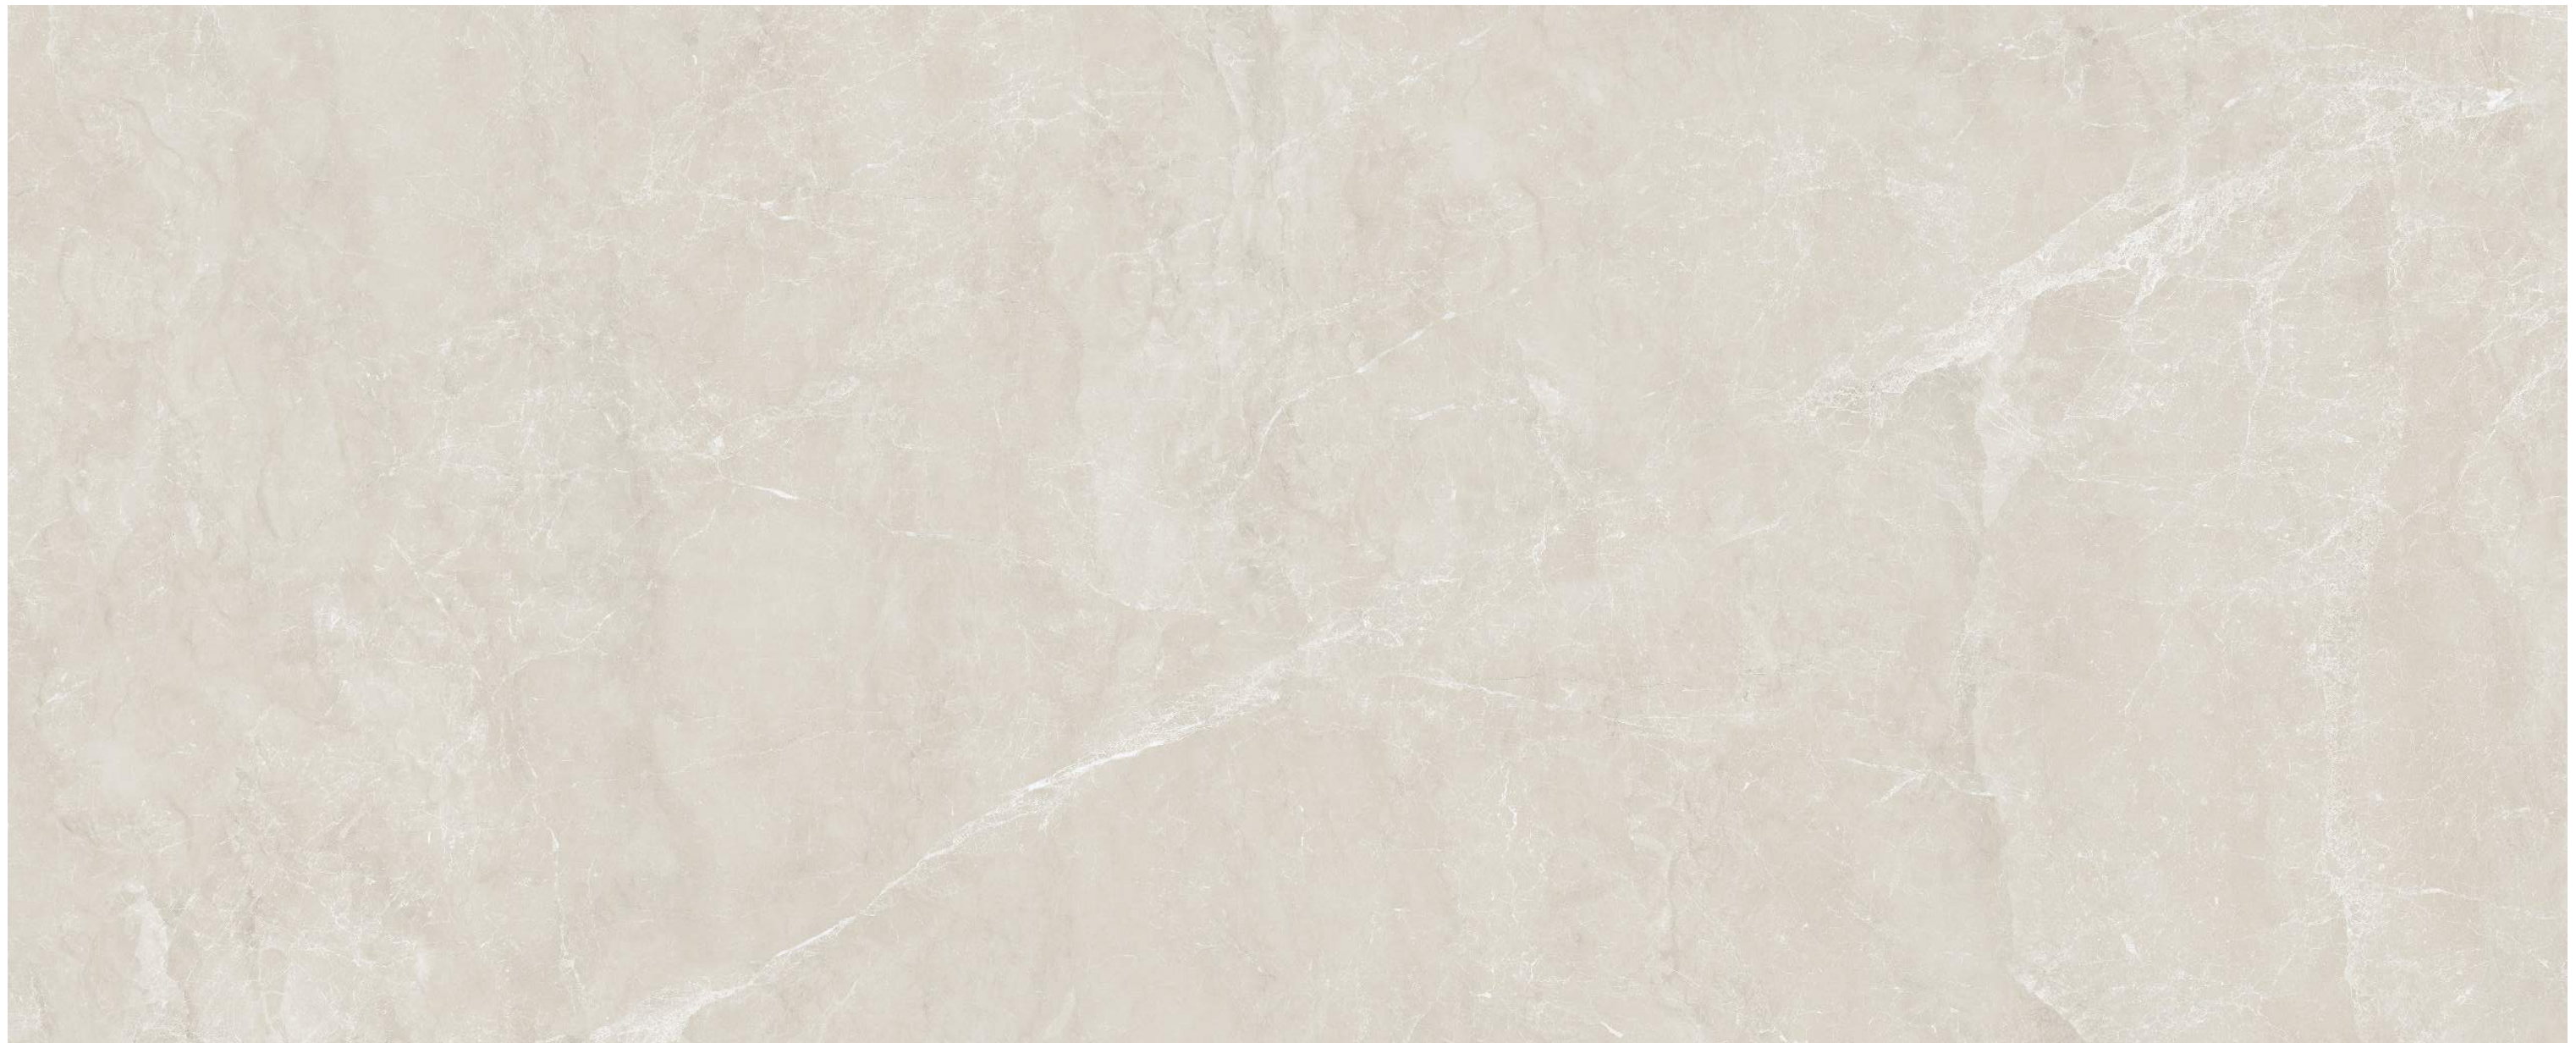



limer grey

limer grey

fab surface

ENDLESS

1200x1800mm

9mm thickness

Random : **02**





michel angelo

Michelangelo

fab surface

ENDLESS

1200x1800mm

9mm thickness

Random : 02





oriental grey

oriental grey

fab surface

ENDLESS

1200x1800mm

9mm thickness

Random : **02**





pallisandro white

pallisandro white

fab surface

1200x1800mm

9mm thickness

Random : 03





MEMBER EARLY HOURS
JANUARY 1, 2019
FIGUR



perlato royal

perlato royal

fab surface

1200x1800mm

9mm thickness

Random : 03





romania beige

romania beige



fab surface

ENDLESS

1200x1800mm

9mm thickness

Random : **03**

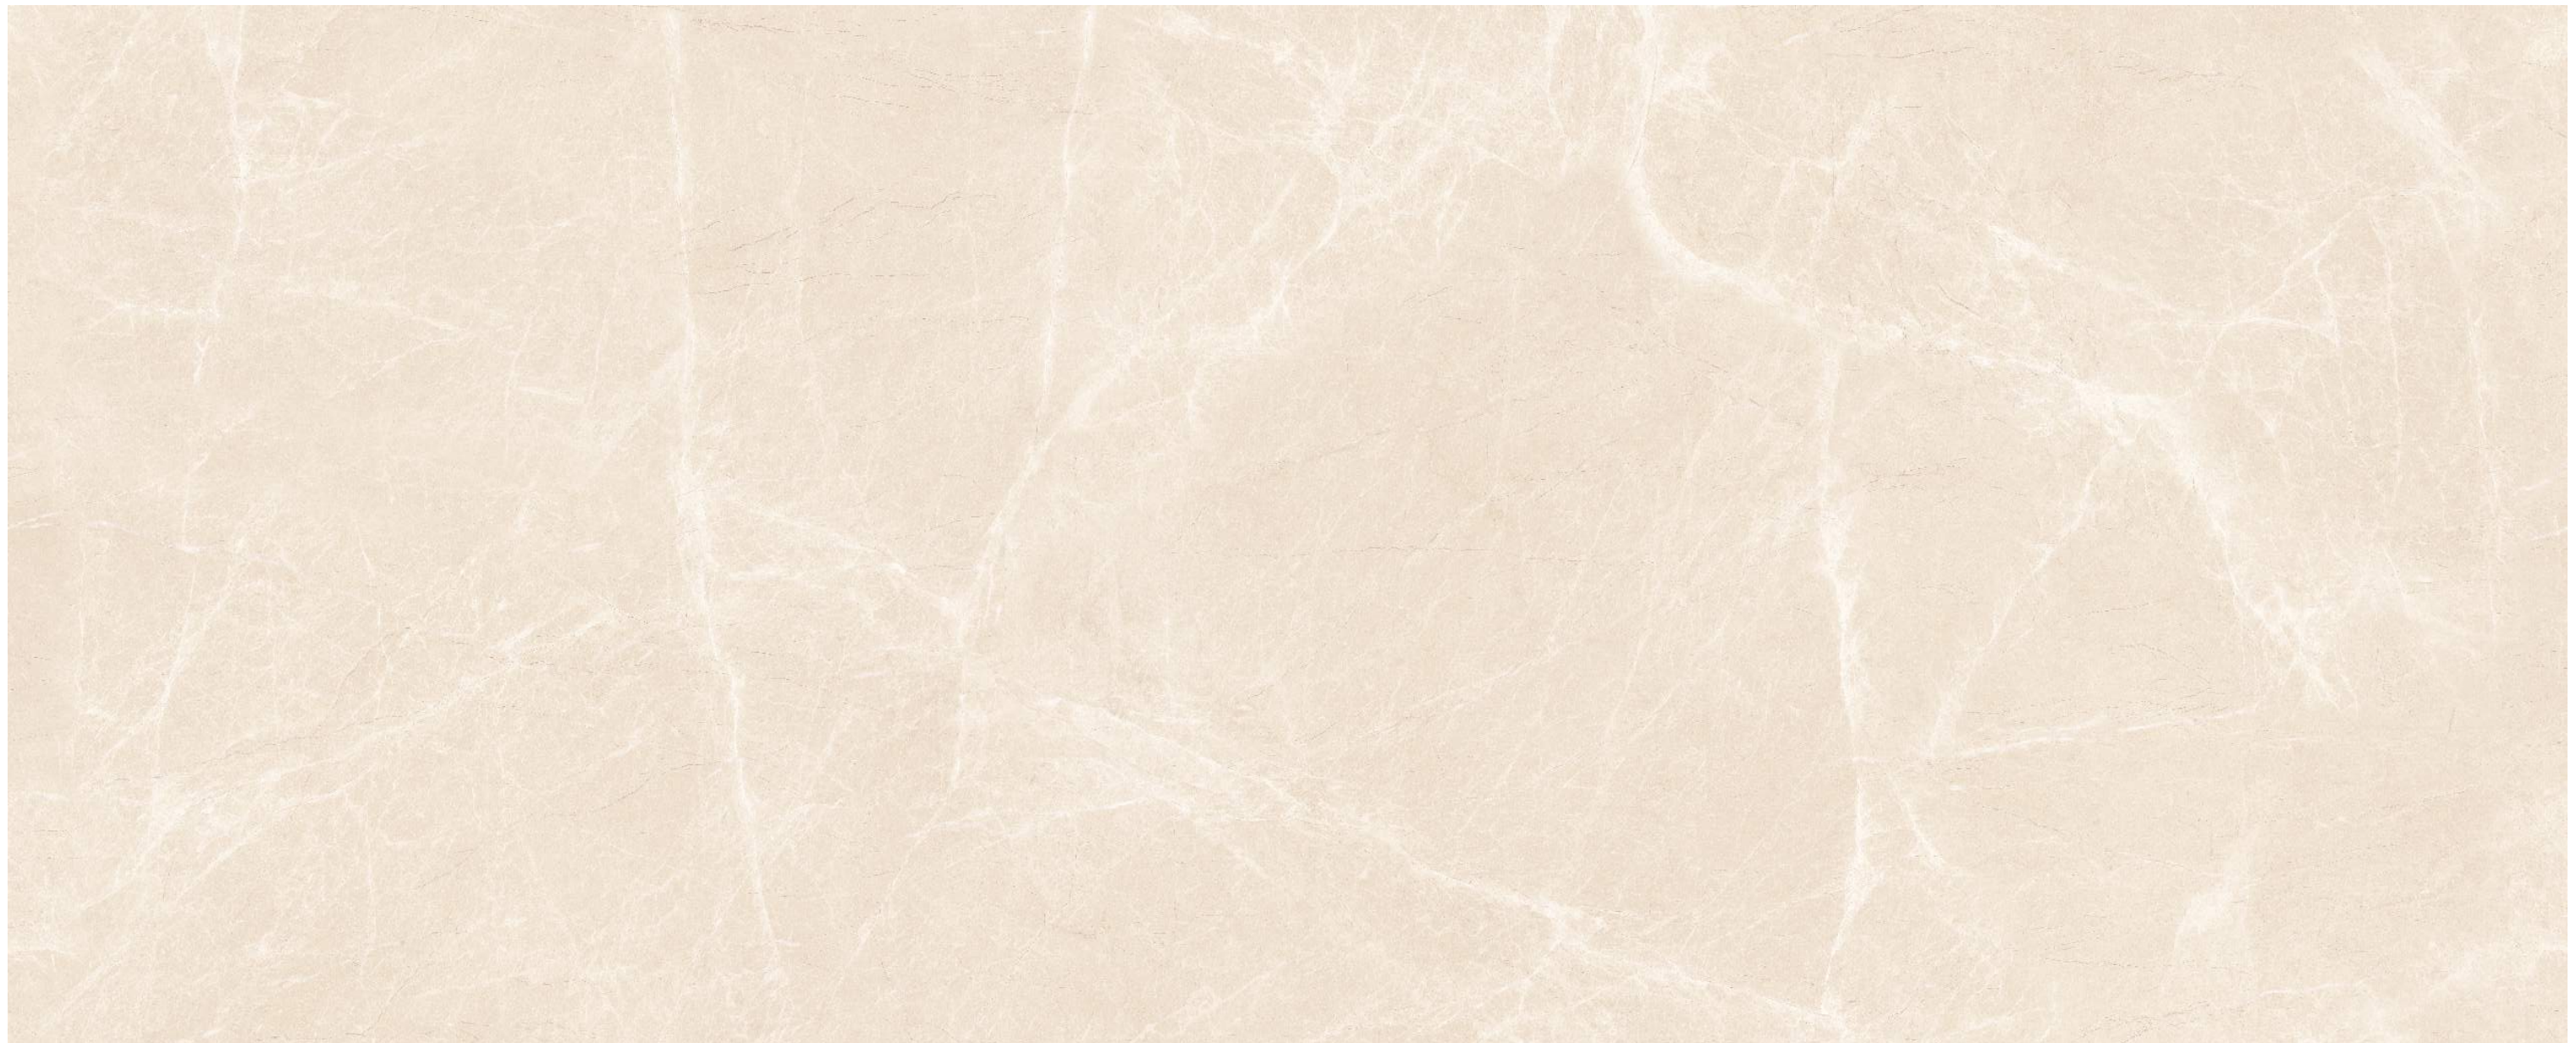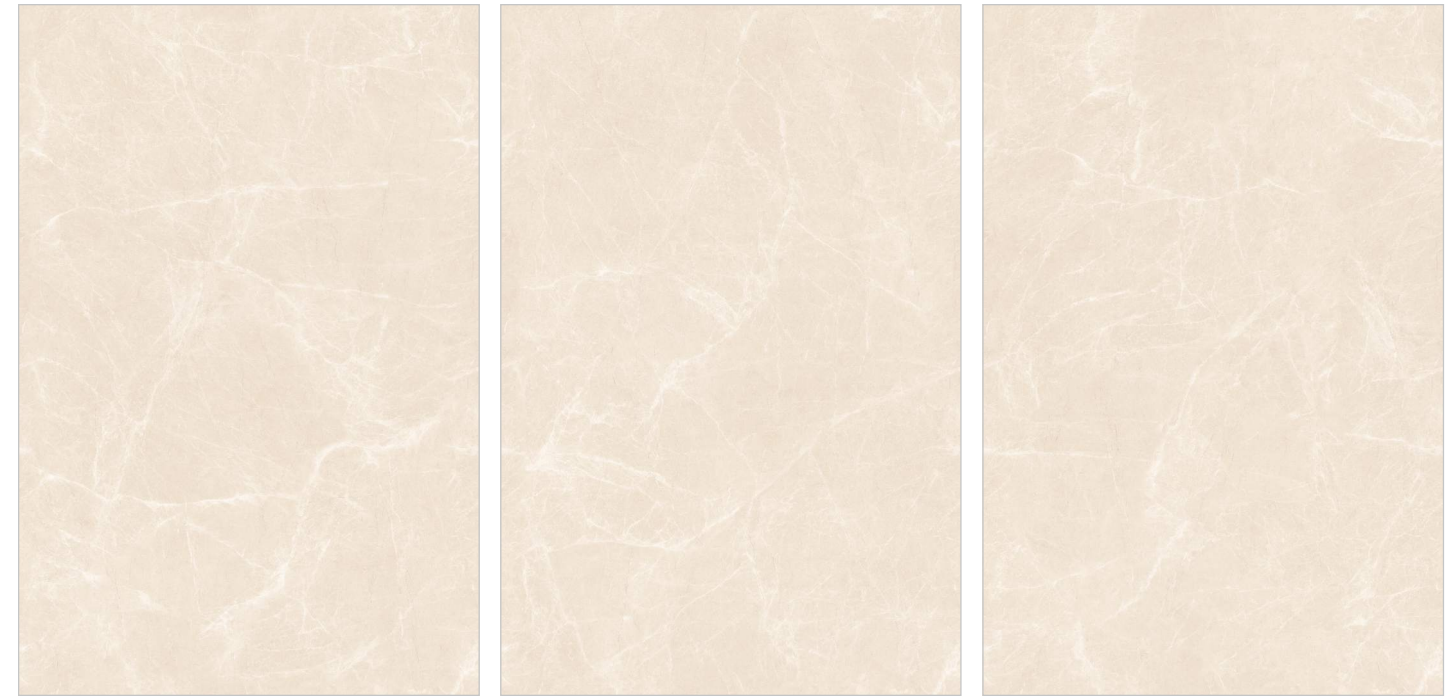



RECEPTION

romania grey

romania grey


fab surface

ENDLESS

1200x1800mm

9mm thickness

Random : **03**

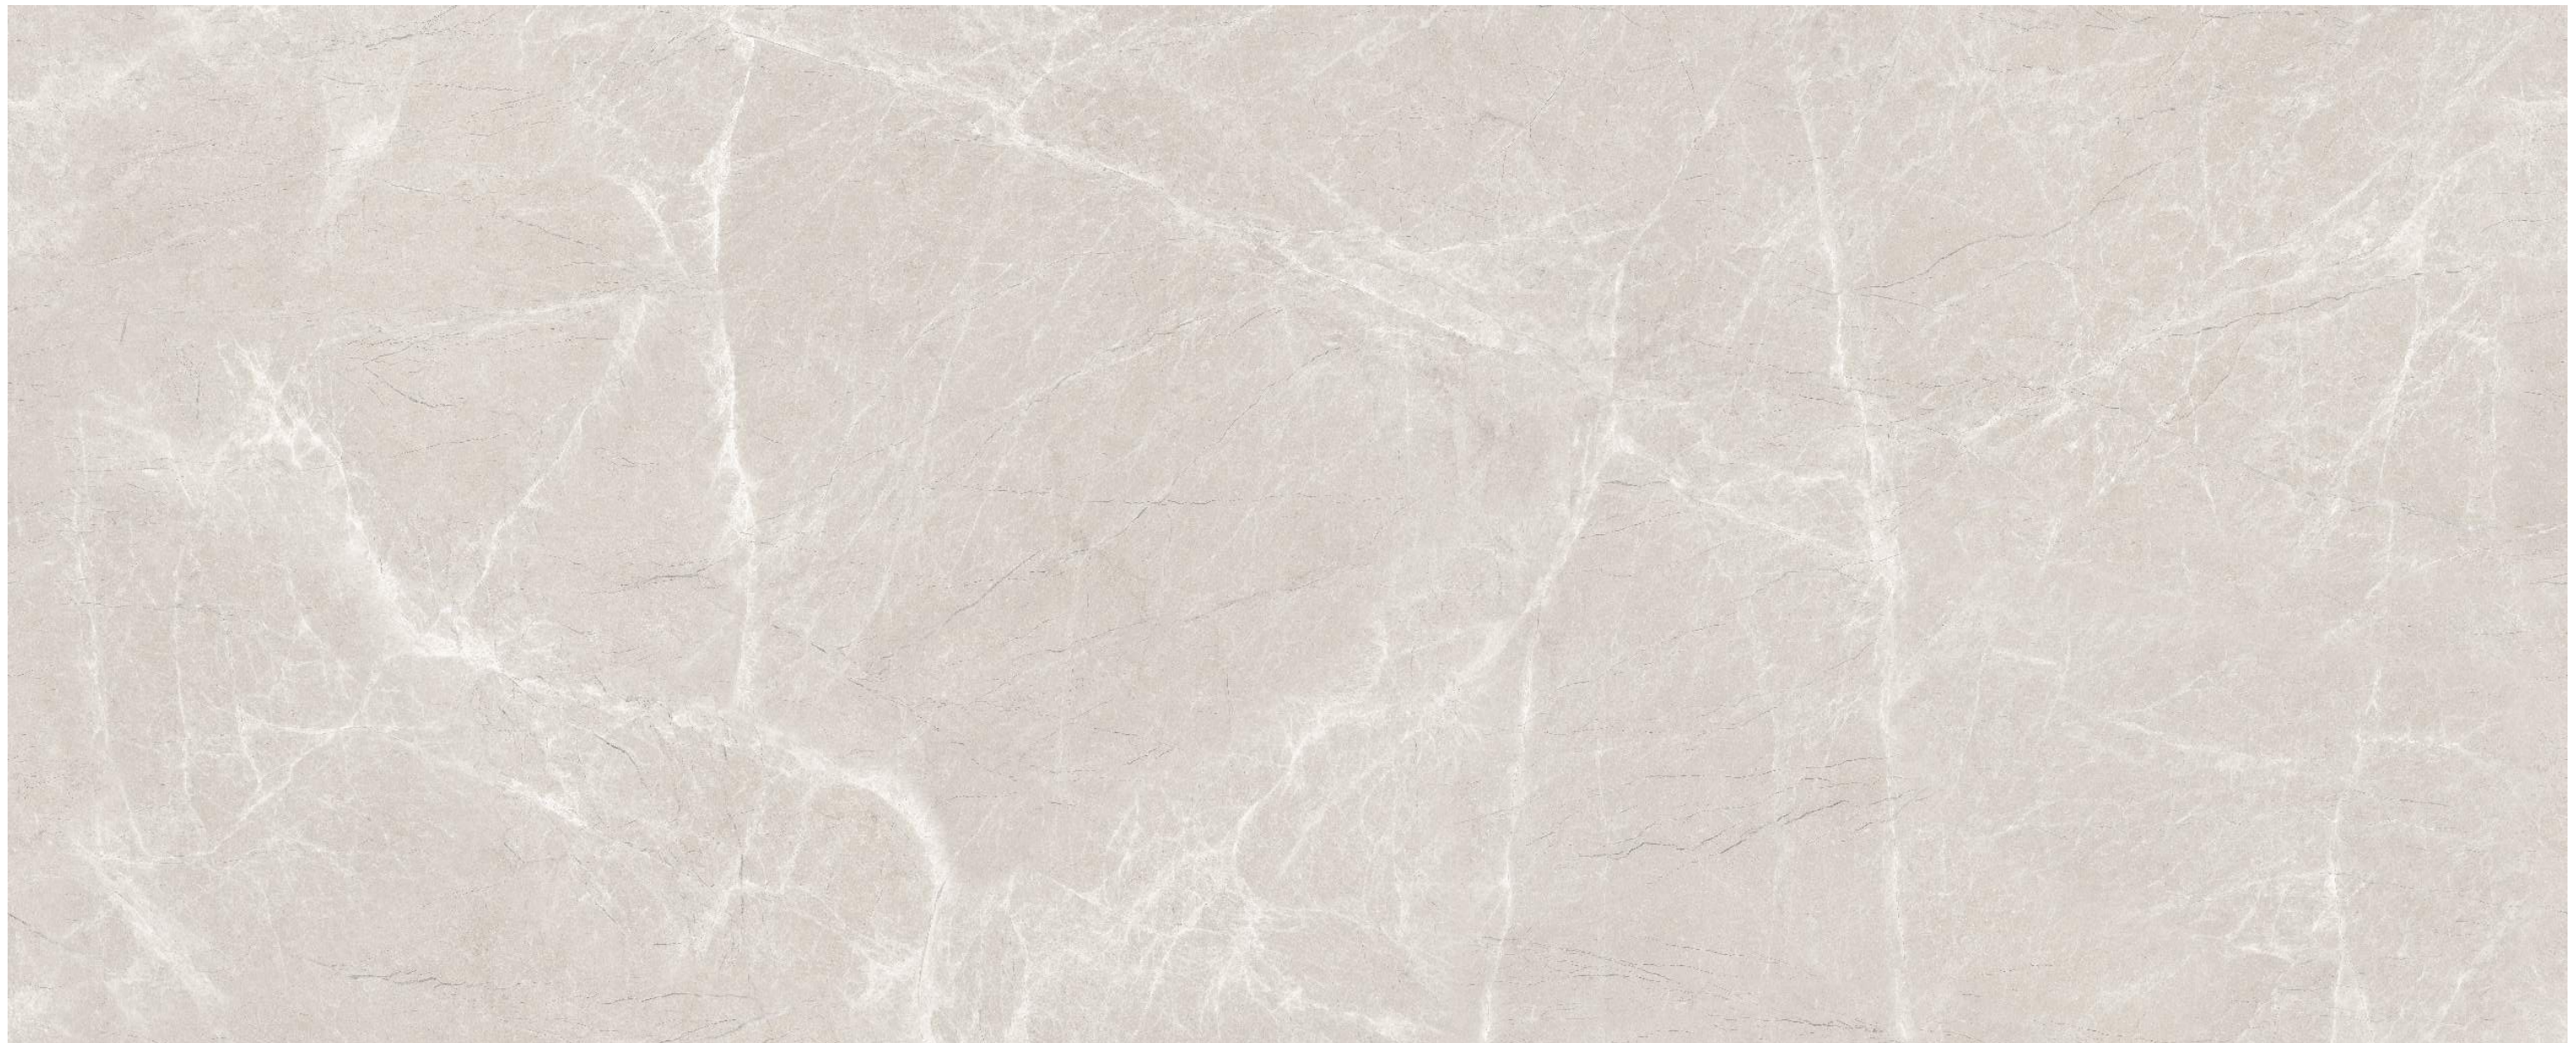



sparkle beige

sparkle beige

fab surface

ENDLESS

1200x1800mm

9mm thickness

Random : **02**





syber ash

syber ash

fab surface

ENDLESS

1200x1800mm

9mm thickness

Random : **04**





tokyo white

tokyo white


fab surface

ENDLESS

1200x1800mm

9mm thickness

Random : **03**

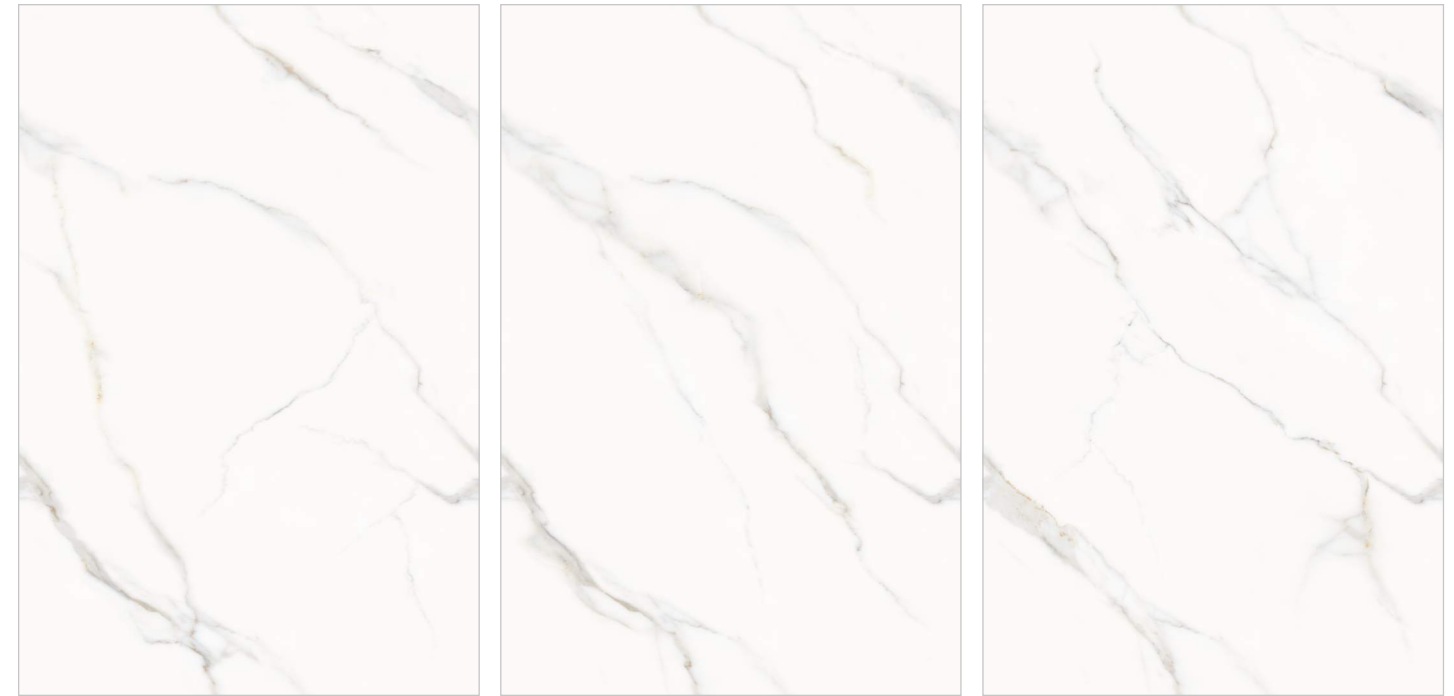



turkish beige

turkish beige



fab surface

ENDLESS

1200x1800mm

9mm thickness

Random : **03**

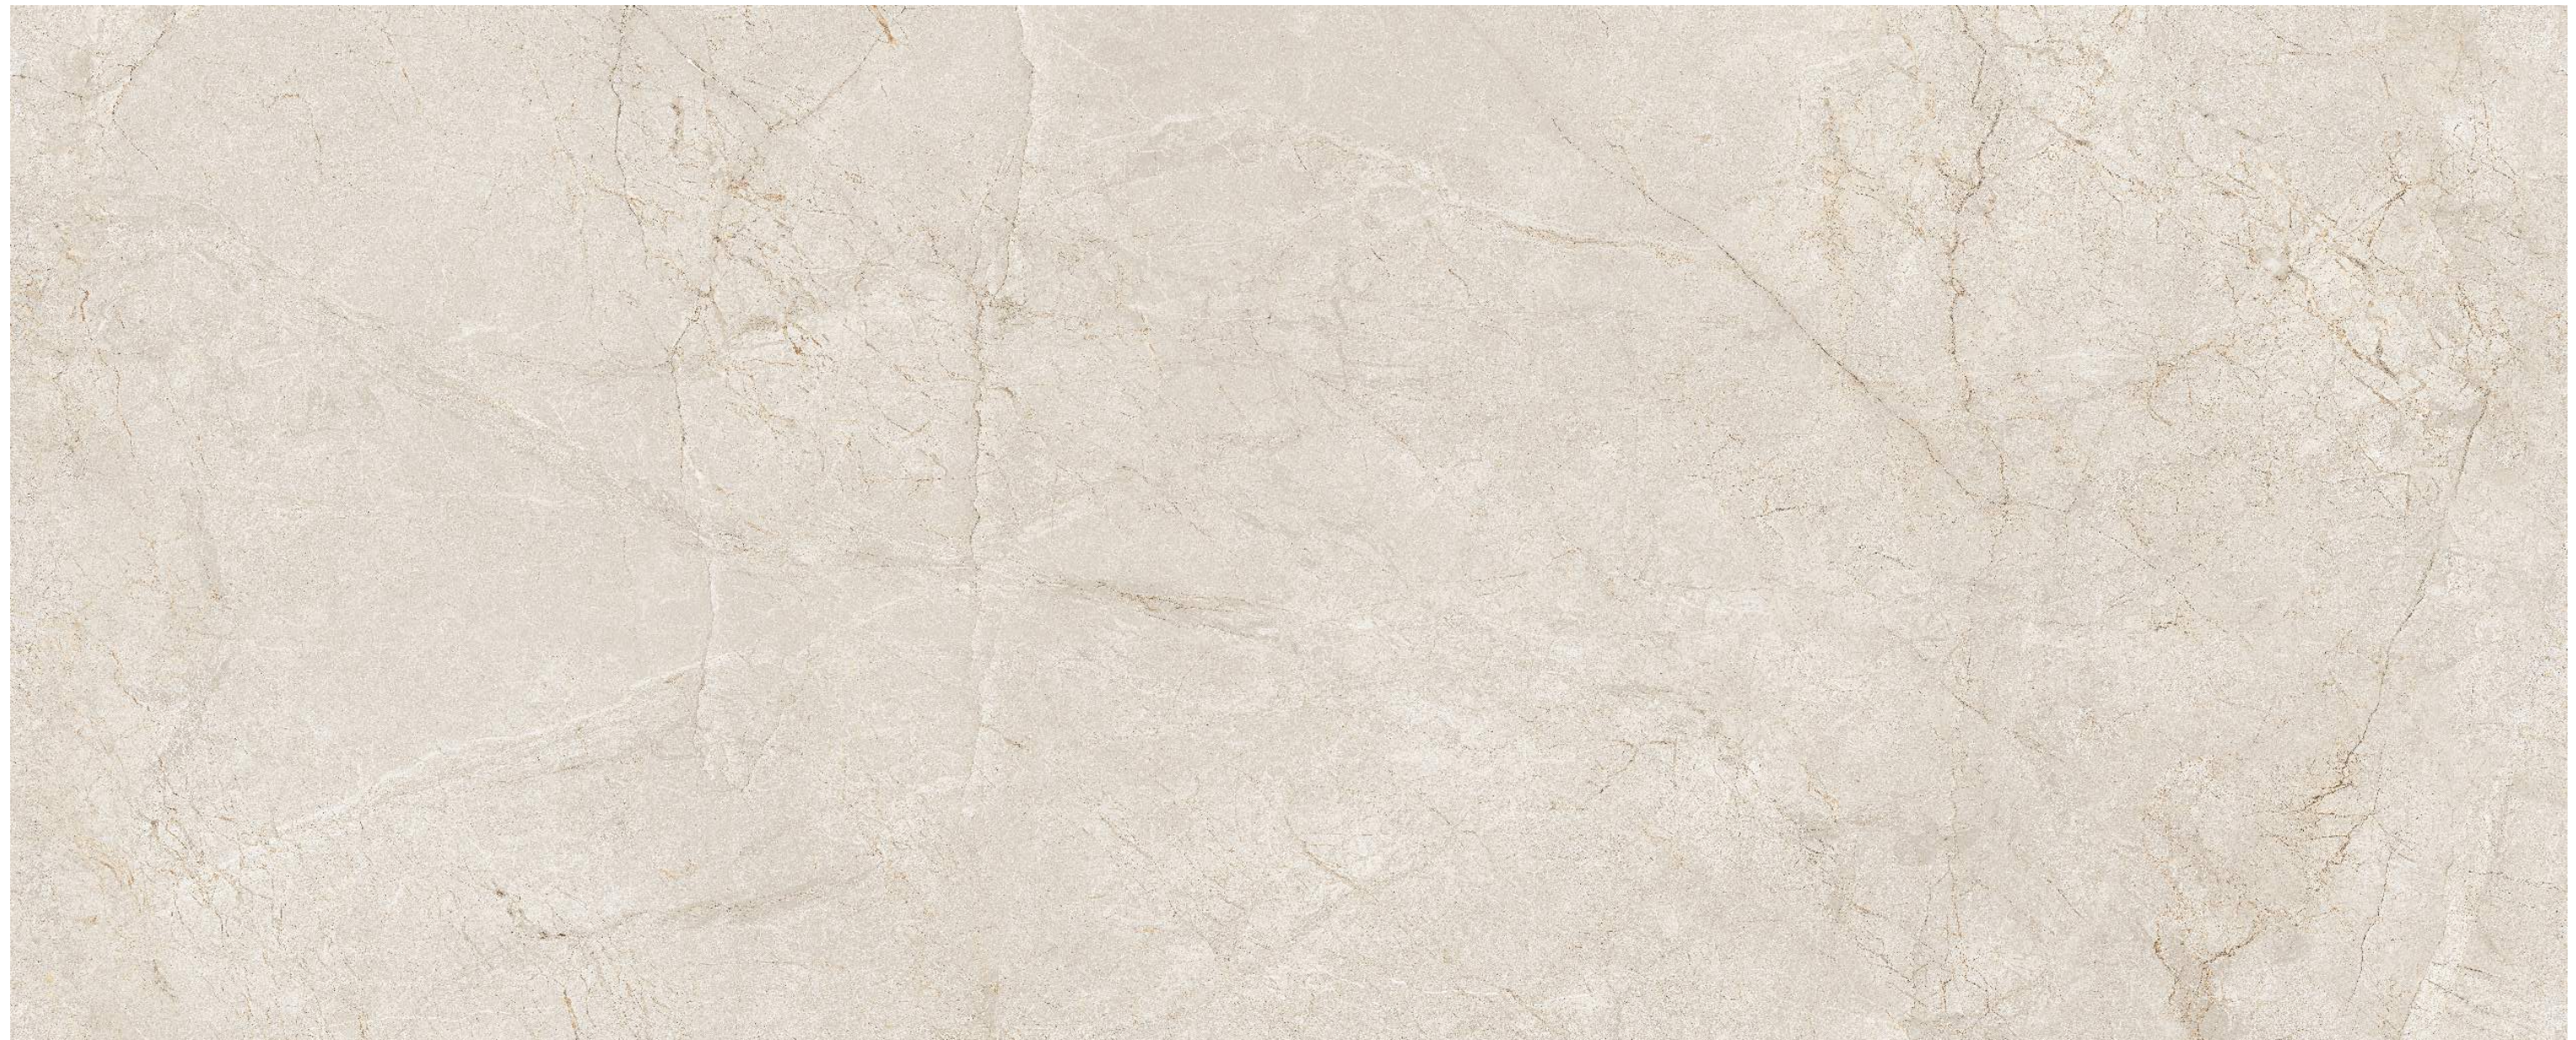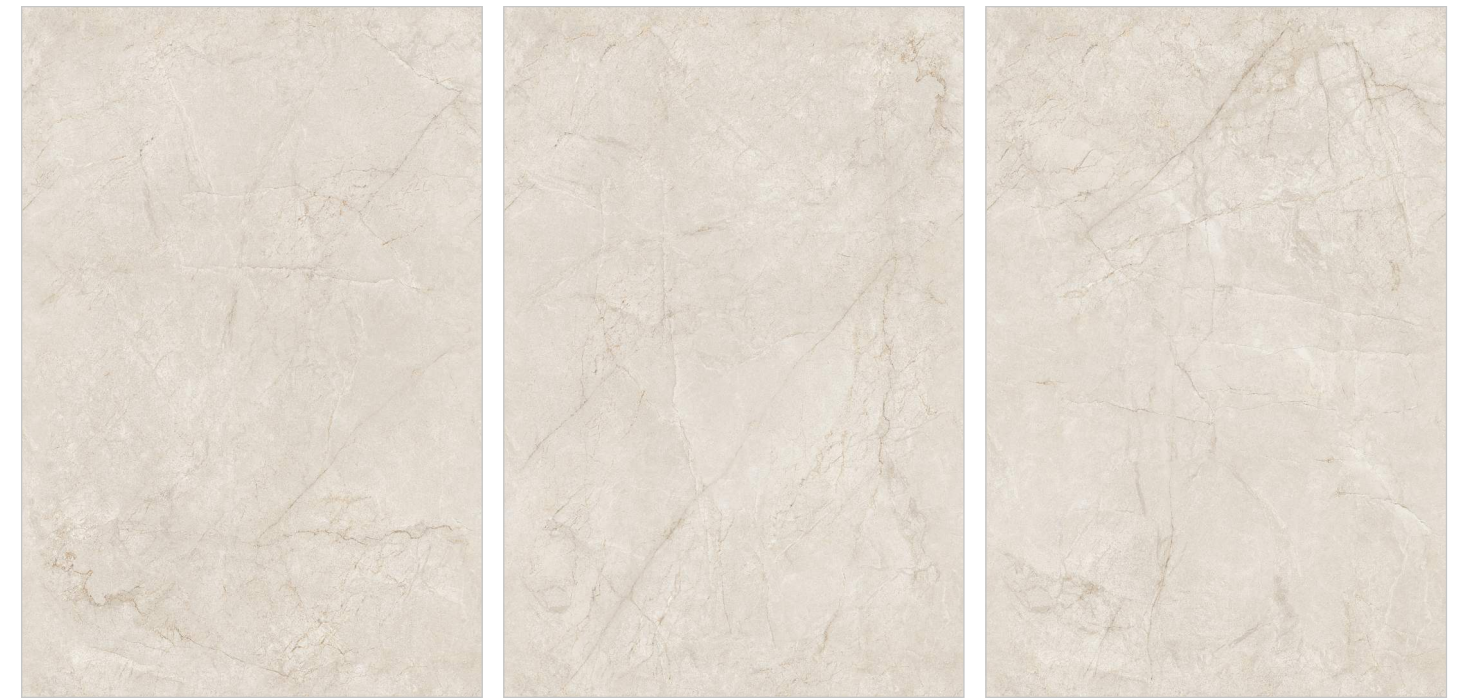



turkish grey

turkish grey

fab surface

ENDLESS

1200x1800mm

9mm thickness

Random : **03**



TECHNICAL SPECIFICATION

TEST DESCRIPTION	TEST METHOD	ISO STANDARD 13006 B1a TILES	VALUE
Length and width	BS EN ISO 10545-2	± 0.6%	± 0.3%
Thickness	BS EN ISO 10545-2	± 5.0%	± 3.0%
Straightness of sides	BS EN ISO 10545-2	± 0.5%	± 0.3%
Rectangularity	BS EN ISO 10545-2	± 0.6%	± 0.3%
Surface flatness	BS EN ISO 10545-2	± 0.5%	± 0.3%
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.05%
Breaking strength	BS EN ISO 10545-4	≥ 1300N	≥ 1500N
Modulus of rupture	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 45N/mm ²
Resistance to deep abrasion	BS EN ISO 10545-6	≤ 175mm ³	≤ 150mm ³
Linear thermal expansion	BS EN ISO 10545-8	≤ 9 x 10 ⁻⁶ °C ⁻¹	≤ 7 x 10 ⁻⁶ °C ⁻¹
Thermal shock resistance	BS EN ISO 10545-9	No visible defect	No visible defect
Frost resistance	BS EN ISO 10545-12	Frost proof	Frost proof
Resistance to chemicals	BS EN ISO 10545-13	No visible effect	No visible effect
Resistance to stain	BS EN ISO 10545-14	Manufacturer to state class	Stains removed Min. Class 2
Colour resistance	BS EN ISO 10545-16	No damage	No damage
Colour resistance to UV Light	DIN 51094	No change in color	No change in color
Scratch hardness(MOH's Scale)	EN 101	≥ 6 MOHS	≥ 7 MOHS
Surface quality	BS EN ISO 10545-2	Min. 95%	No visible defect
Skid resistance (friction co-efficient)	BS EN ISO 10545-17	> 0.4	>0.4
Moisture Expansion	-	Nil	Nil



PACKING DEATILS

Size	Pcs / Box	Weight (Approx)	Thickness (Approx)	SQ. / Box
1200x1800	2	90 kg	9mm	46.50

THANK YOU